





Coaxial Attenuator

Features and Electrical specifications:

Model	ATXXRA100C-SMA-18
Frequency Range	DC-18.0GHz
VSWR	1.45Max
Power	100 W
Impedance	50 Ω
Attenuation	10,20,30,40dB
Attenuation Tolerance	-1.5dB/+2.5dB
Connector	SMA-J(M)/SMA-K(F)
Dimension	$\Phi 60 \times 171.5 \text{mm}$
Operating Temperature	-55 ~ +125°C (See de Power De-rating)
Weight	About 580 g
ROHS Compliant	Yes

Outline Drawing (Unit: mm/inch):

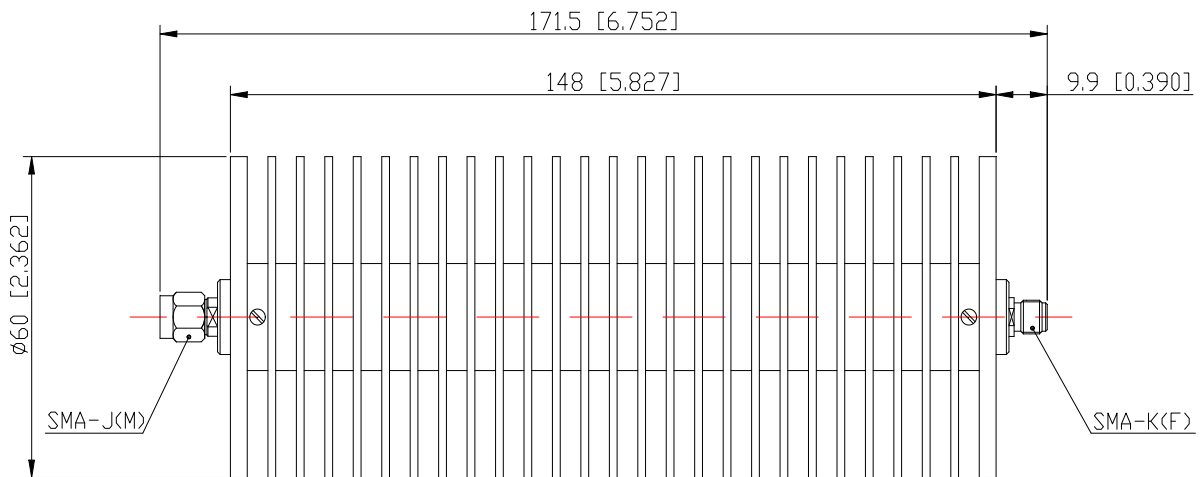




Naming rules:



Power De-rating:

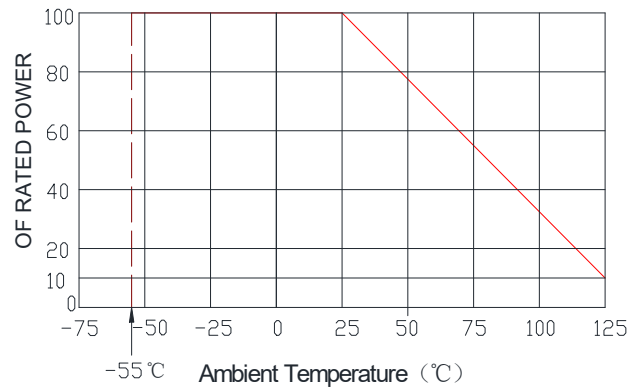

Use attention:

- 1、 Dimensions Tolerance $\pm 3\%$;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation ;
- 3、 Custom designs available of other special attenuators ;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection。