




## Coaxial Attenuator

### Features and Electrical specifications:

|                       |  |              |              |              |
|-----------------------|--|--------------|--------------|--------------|
| Model                 | ATXXFA250A-4310-6                                |              |              |              |
| Frequency Range       | DC-6.0GHz  |              |              |              |
| VSWR                  | 1.35Max  |              |              |              |
| Power                 | 250 W  |              |              |              |
| Impedance             | 50 $\Omega$                                      |              |              |              |
| Attenuation           | 01-10dB  | 11-20dB      | 21-40dB      | 50dB         |
| Attenuation Tolerance | $\pm 1.0$ dB                                     | $\pm 1.2$ dB | $\pm 1.3$ dB | $\pm 1.4$ dB |
| Connector             | 4.3-10J(M)/4.3-10K(F)                            |              |              |              |
| Dimension             | 78 $\times$ 80 $\times$ 320mm                    |              |              |              |
| Operating Temperature | -55 ~ +125 $^{\circ}$ C (See de Power De-rating) |              |              |              |
| Weight                | About 2.2 Kg                                     |              |              |              |
| ROHS Compliant        | Yes  |              |              |              |

Outline Drawing (Unit: mm/inch):

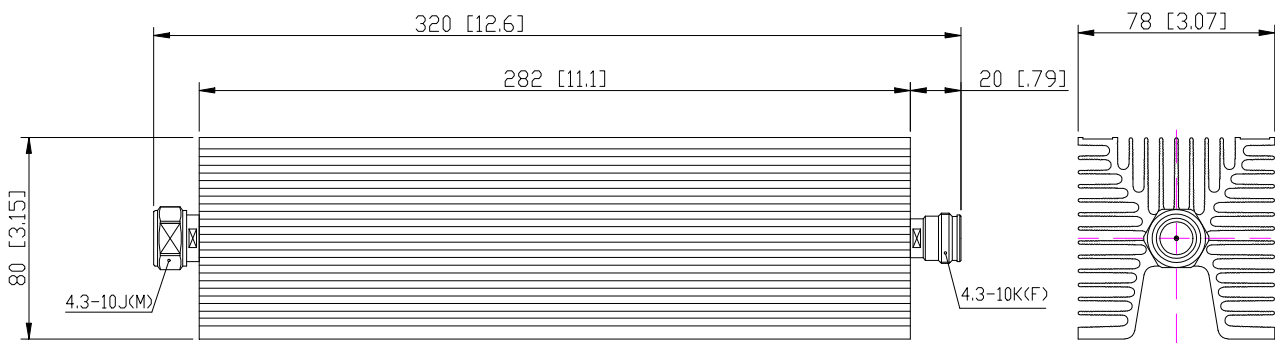

**RFTYT Technology Co., LTD.**

<http://www.rfyt.com>

E-mail: Jackson@rfyt.com      zqc7708@rfyt.com

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**



**Naming rules:**



**Power De-rating:**



**Use attention:**

- 1、 Dimensions Tolerance  $\pm 3\%$ ;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation ;
- 3、 Custom designs available of other special attenuators ;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection。