





## Coaxial Attenuator

### Features and Electrical specifications:

Model	ATXXFA300A-DIN-6			
Frequency Range	DC-6.0GHz			
VSWR	1.35Max			
Power	300 W			
Impedance	50 $\Omega$			
Attenuation	01-10dB	11-20dB	21-30dB	50dB
Attenuation Tolerance	$\pm 1.0$ dB	$\pm 1.2$ dB	$\pm 1.3$ dB	$\pm 1.4$ dB
Connector	DIN-J(M)/DIN-K(F)			
Dimension	78 $\times$ 80 $\times$ 325.85mm			
Operating Temperature	-55 ~ +125 $^{\circ}$ C (See de Power De-rating)			
Weight	About 2.3 Kg			
ROHS Compliant	Yes			

### Outline Drawing (Unit: mm/inch):

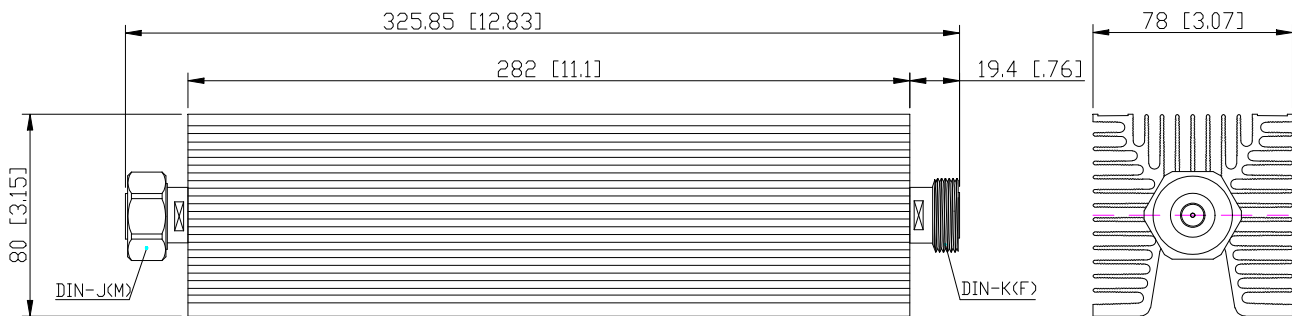




**Naming rules:**



**Power De-rating:**

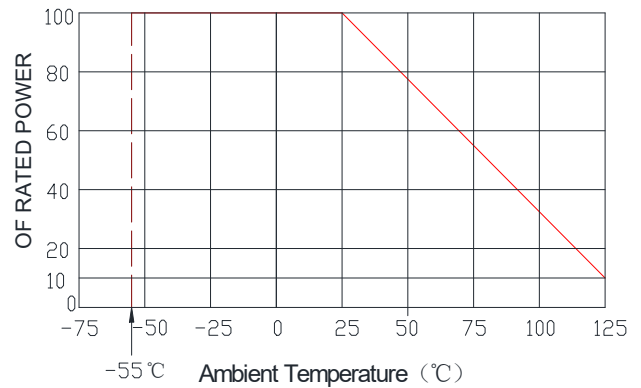

**Use attention:**

- 1、 Dimensions Tolerance  $\pm 3\%$ ;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation ;
- 3、 Custom designs available of other special attenuators ;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection。