





Coaxial Attenuator

Features and Electrical specifications:

Model	ATXXFA500A-DIN-6	
Frequency Range	DC-6.0GHz	
VSWR	1.35Max@DC-50MHz	1.30Max@ 50MHz-6GHz
Power	500 W	
Impedance	50 Ω	
Attenuation	20、30、40、50dB	
Attenuation Tolerance	±3.5dB	
Connector	DIN-J(M)/DIN-K(F)	
Dimension	78×80x607mm	
Operating Temperature	-55 ~ +125°C (See de Power De-rating)	
Weight	About 3.7 Kg	
ROHS Compliant	Yes	

Outline Drawing (Unit: mm/inch):

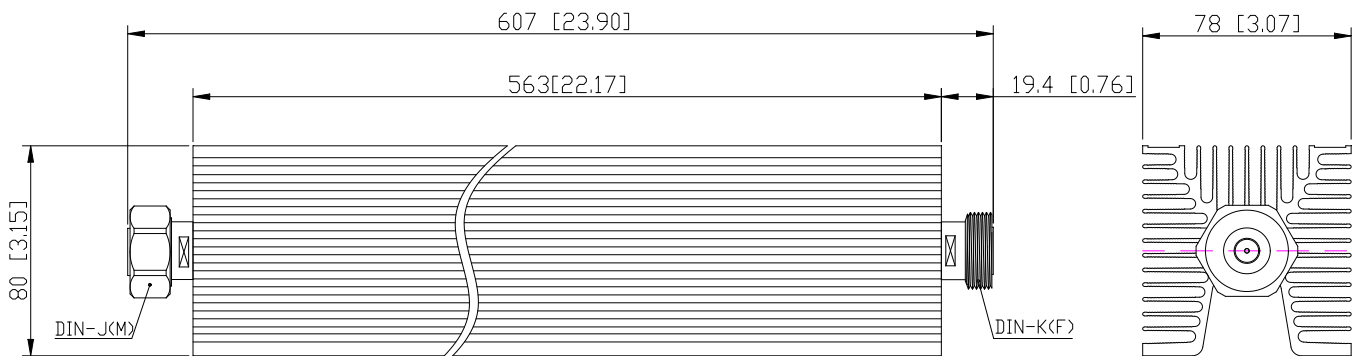



Naming rules:



Power De-rating:



Use attention:

- 1、 Dimensions Tolerance $\pm 3\%$;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation ;
- 3、 Custom designs available of other special attenuators ;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection。