




## 3 Way Power Divider

### Features and Electrical specifications:

Model	PD03-F70-N/134-3700MHz	
Frequency Range	134-3700 MHz	
Insertion Loss	≤3.6dB(Exclusive the 4.8dB Split Loss)	
Isolation	18 dB Min	
VSWR	Input: 1.5 Max	Output: 1.4 Max
Amplitude Unbalance	±0.8 dB	
Phase Unbalance	± 10°	
Rated Power	Forward Power: 20 W	Reverse Power: 2 W
Impedance	50 Ω	
Connector Type	N-F	
Dimension	210.0X70.0X20.0 mm	
Surface Finishing	Black Painting	
Operating Temperature	-45 ~ +75°C	
ROHS Compliant	Yes	

Outline Drawing (Unit: mm):

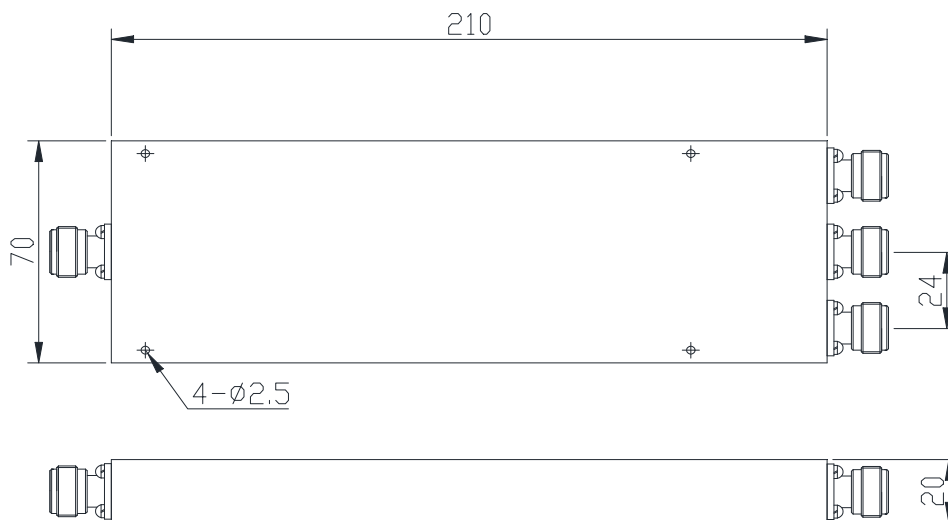

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**