8 Way Power Divider

Features and Electrical specifications:

Model	PD08-F1190-S/500-4000MHz
Frequency Range	500-4000 MHz
Insertion Loss	≤1.80dB (Excluding 3.0dB separation loss)
Isolation	18 dB Min
VSWR	Input: 1.50 Max Output: 1.40 Max
Amplitude Unbalance	±0.5 dB
Phase Unbalance	± 5°
Rated Power	Forward Power: 20 W Reverse Power: 1 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	108.0X90.0X10.0 mm
Surface Finishing	Grey Painting
Operating Temperature	-45 ~ +85°C
ROHS Compliant	Yes

Outline Drawing (Unit: mm):

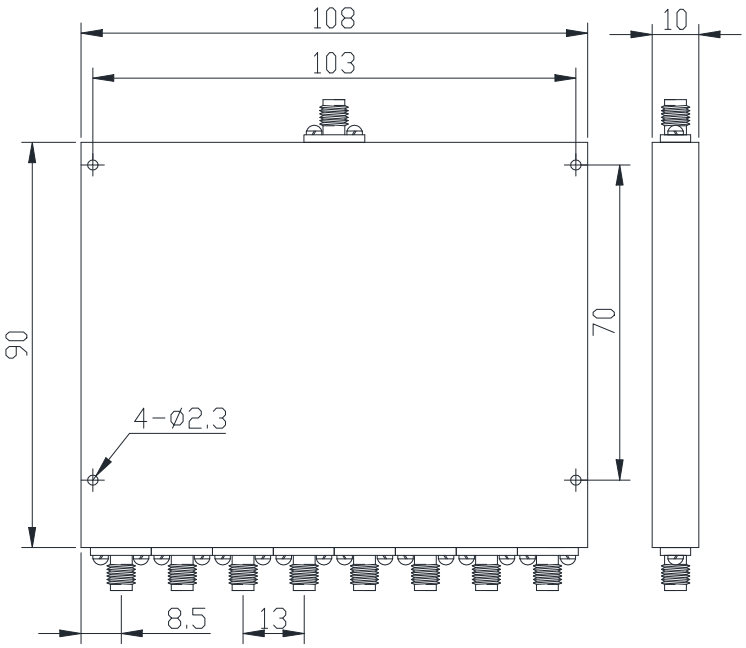

RFTYT Technology Co., LTD.
http://www.rftyt.com
E-mail : jackson@rftyt.com zqc7708@rftyt.com
TEL: +86-13088268828 FAX: +86-816-2846565
218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China