





# 10 Way Power Divider

## Features and Electrical specifications:

Model	PD10-F1311-S/500-3000MHz	
Frequency Range	500-3000 MHz	
Insertion Loss	≤2.00dB	
Isolation	17 dB Min	
VSWR	Input: 1.80 Max	Output: 1.80 Max
Amplitude Unbalance	± 1.0 dB	
Phase Unbalance	± 10°	
Rated Power	Forward Power: 20 W	Reverse Power: 2 W
Impedance	50 Ω	
Connector Type	SMA-F	
Dimension	133.0X113.0X10.0 mm	
Surface Finishing	Grey Painting	
Operating Temperature	-45 ~ +85°C	
ROHS Compliant	Yes	

## Outline Drawing (Unit: mm):

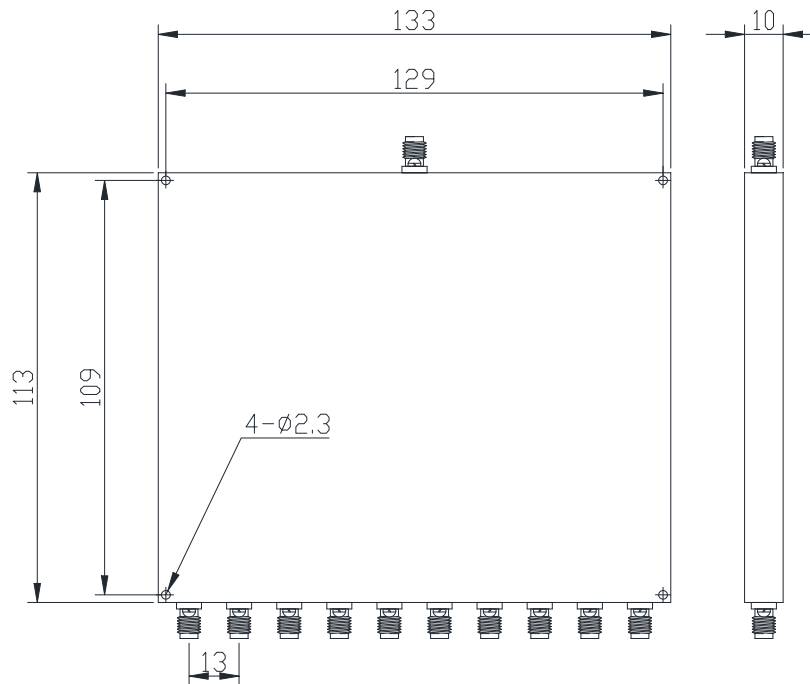

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**