





## Low Pass Filter

### Features and Electrical specifications:

Model	LPF-DCG12A-S
Frequency Range	DC-12000MHz
Insertion Loss	≤0.4dB
Rejection	≥25dB@14400MHz ≥55dB@18000MHz
VSWR	1.7 Max
Rated Power	50 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	50.0X12.7X12.7 (mm)
Surface Finishing	Black Painting
Operating Temperature	Ordinary Temperature
Storage Temperature	-55 ~ +85°C

Outline Drawing (Unit: mm):

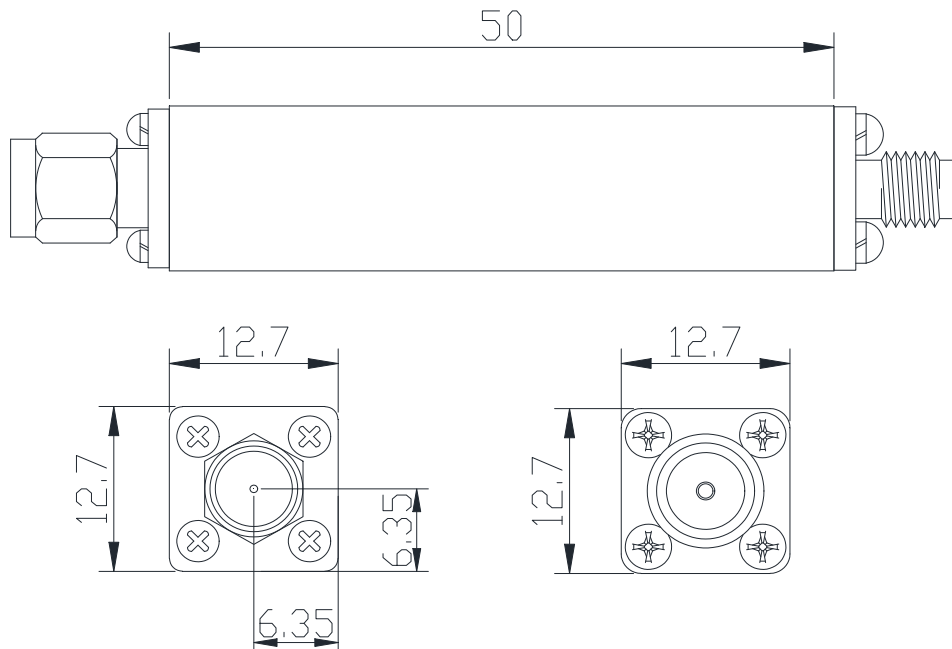

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**