





## 8 Way Power Divider

### Features and Electrical specifications:

Model	PD08-F1185-S/30-5200MHz
Frequency Range	30-5200 MHz
Split loss	9.0 dB
Insertion Loss	$\leq 4.5$ dB@30-500MHz $\leq 2$ dB@500-5200MHz
Isolation	$\geq 15$ dB@500-5200MHz
VSWR	$\leq 1.6$ max@500-5200
Amplitude Balance	$\pm 0.5$ dB
Phase Balance	$\leq \pm 5^\circ$
Rated Power	5 W
Impedance	50 $\Omega$
Connector Type	SMA-F
Dimension	109X85X11.2 mm
Operating Temperature	-35 ~ +75°C
ROHS Compliant	Yes

### Outline Drawing (Unit: mm):

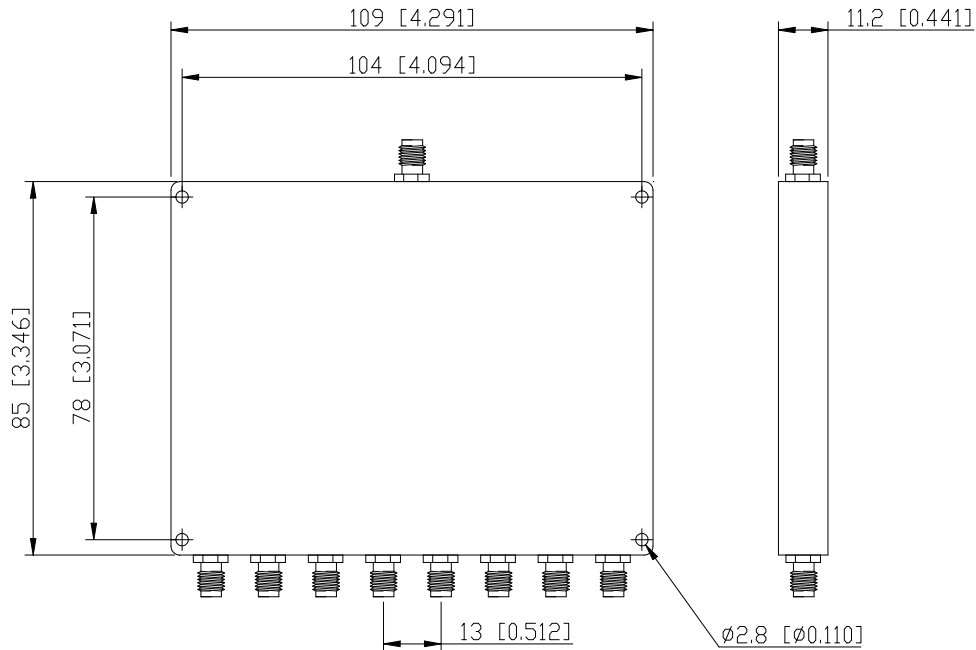

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**