




## High Pass Filter

### Features and Electrical specifications:

Model	HPF-6G24A-S
Frequency Range	6-24GHz
Insertion Loss	≤2.0dB
Rejection	≥60dB@DC-5400MHz
VSWR	1.8 Max
Rated Power	15 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	35.0x22.0x10.0mm
Surface Finishing	Black Painting
Operating Temperature	Ordinary temperature
Storage Temperature	-55 ~ +85°C

Outline Drawing (Unit: mm):

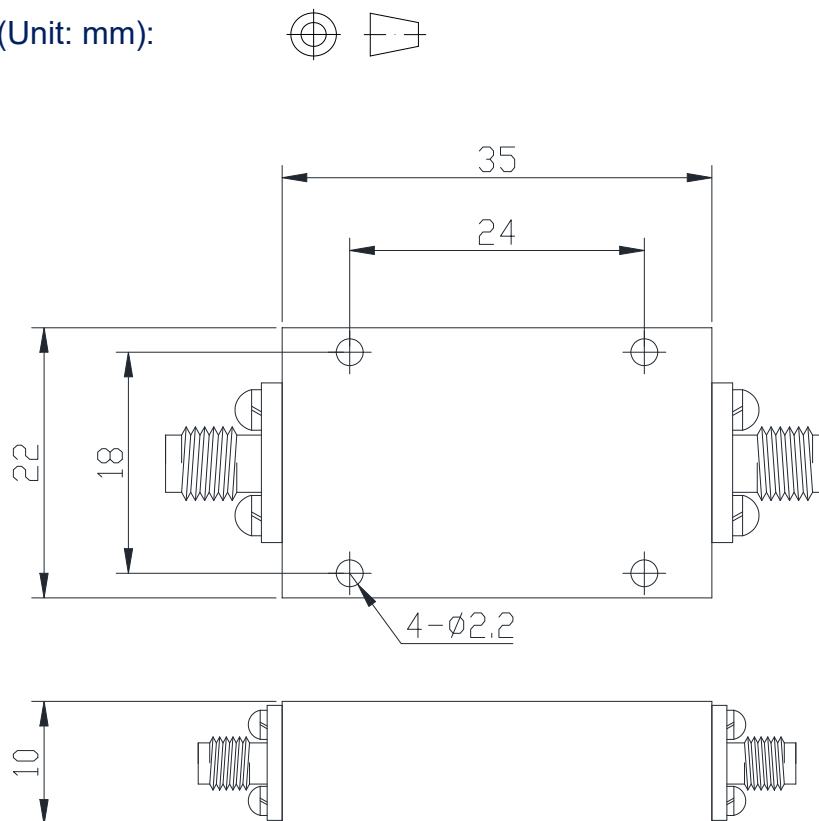

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**