




## Band Stop Filter

### Features and Electrical specifications:

Model	BPF-2500M2570A-S
Rejection band	2500-2570MHz
Pass band	DC~2485MHz & 2585~4000MHz
Insertion Loss	≤3.0dB
Rejection	≥40dB
VSWR	2.0 Max
Rated Power	10 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	125.0x32.0x22.0mm
Surface Finishing	Black Painting
Operating Temperature	Ordinary temperature
Storage Temperature	-55 ~ +85°C

### Outline Drawing (Unit: mm):

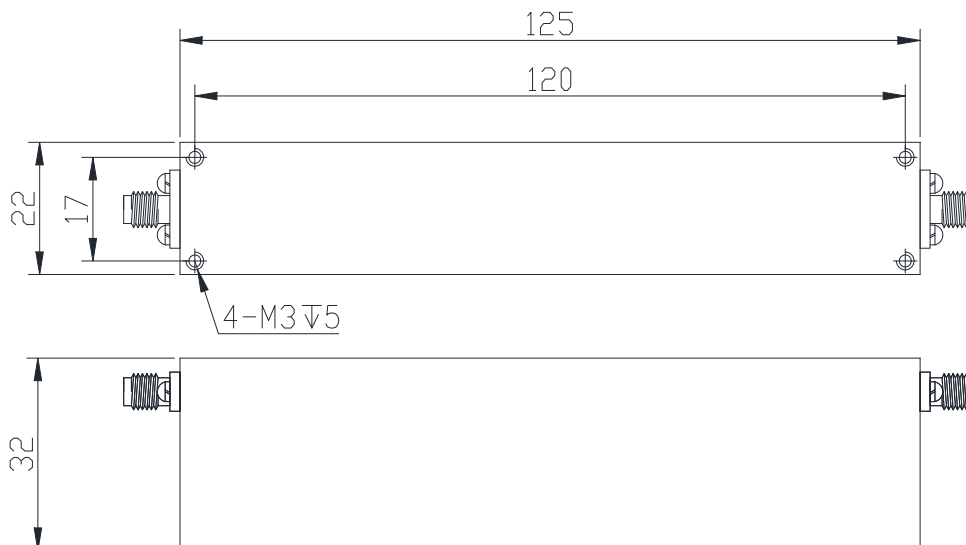

**RFTYT Technology Co., LTD.**

<http://www.rfyt.com>

E-mail : [jackson@rfyt.com](mailto:jackson@rfyt.com)      [zqc7708@rfyt.com](mailto:zqc7708@rfyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**