





# Directional Coupler

## Features and Electrical specifications:

Model	CP06-F2155-N/2-6GHz
Frequency Range	2.0~6.0 GHz
Insertion Loss	≤1.5dB
Nominal Coupling	6±1dB
Directivity	≥18dB
VSWR	1.35 Max
Rated Power	30W
Impedance	50 Ω
Connector Type	N-F
Dimension	55.0×21.0×22.3 mm
Operating Temperature	-55 ~ +85°C
ROHS Compliant	Yes

Outline Drawing (Unit: mm):

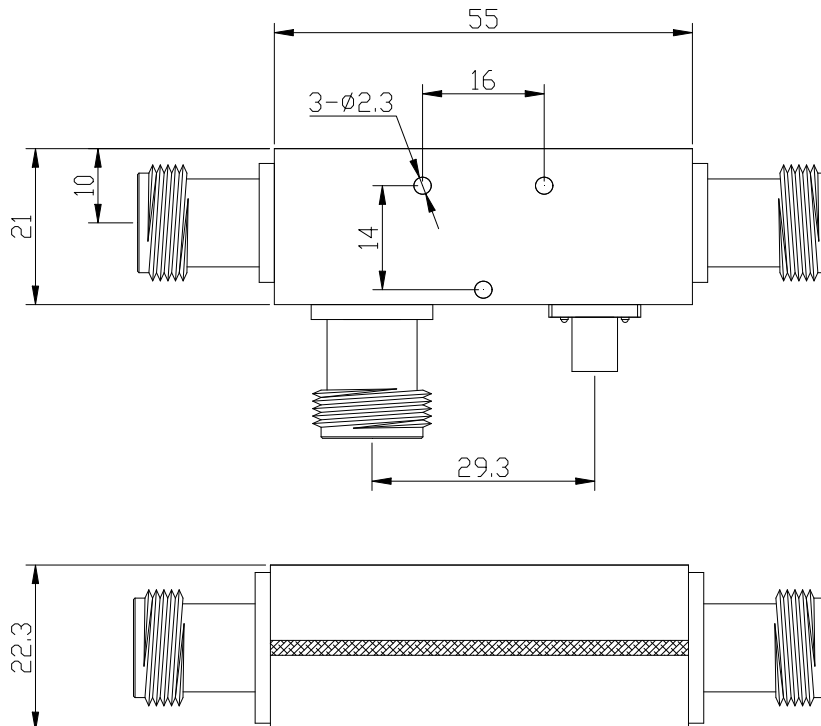

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**