High Pass Filter

Features and Electrical specifications:

Model	HPF-1.5G14A-S
Frequency Range	1.5-14GHz
Insertion Loss	≤1.5dB@1500-1600MHz ≤1.0dB@1600-14000MHz
Rejection	≥50dB@DC-1170MHz
VSWR	1.5 Max
Rated Power	15 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	46.0x20.0x10.0mm
Surface Finishing	Black Painting
Operating Temperature	Ordinary temperature
Storage Temperature	-55 ~ +85°C

Outline Drawing (Unit: mm):

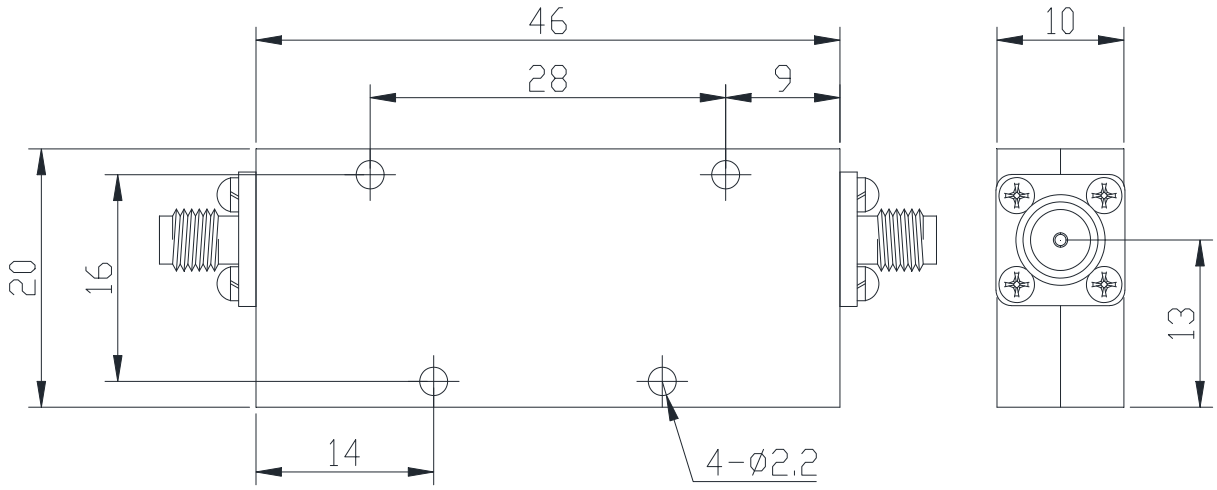

RFTYT Technology Co., LTD.
http://www.rftyt.com
E-mail: jackson@rftyt.com zqc7708@rftyt.com
TEL: +86-13088268828 FAX: +86-816-2846565
218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China