





## 2 Way Power Divider

### Features and Electrical specifications:

Model	PD12-F1592-S/3000-3500MHz
Frequency Range	3000-3500 MHz
Insertion Loss	≤1.0dB
Input Port VSWR	1.70 Max
Output Port VSWR	1.40 Max
Isolation	20 dB Min
Amplitude Balance	±0.5dB
Phase Balance	± 8°
Impedance	50 Ohms
Connector Type	SMA-Female
Power Rating	20W
Reverse power	1W
Operation Temperature	-40~ +80°C
Storage temperature	-45~ +85°C
Surface Finishing	Grey Painting
Outline Dimensions	156.0×92.0×10 (mm)

### Outline Drawing (Unit: mm):

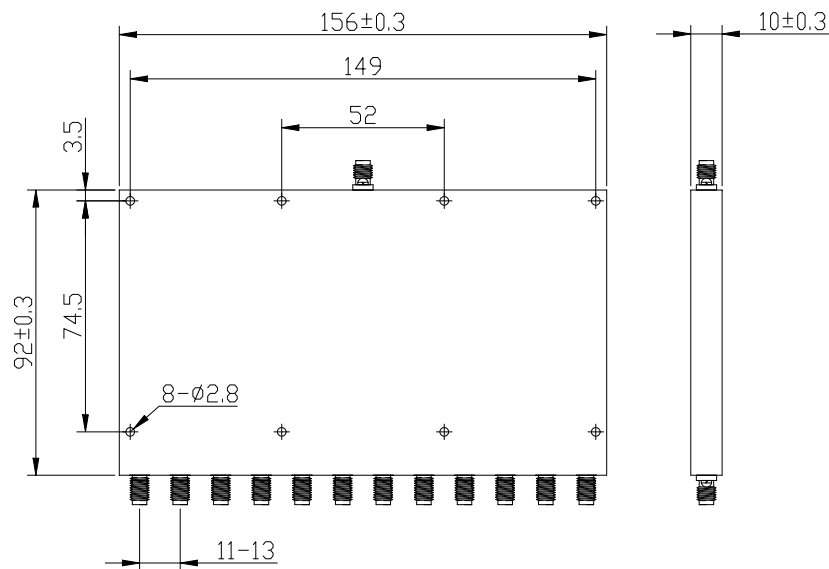

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail : [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**