




4 Way Power Divider

Features and Electrical specifications:

Model	PD04-F7074-S/500-2500MHz
Frequency Range	500-2500 MHz
Split loss	6.0 dB
Insertion Loss	≤1.2 dB
Isolation	≥20 dB Min
VSWR	≤1.30
Amplitude Balance	≤±5°
Rated Power	40 W
Impedance	50 Ω
Connector Type	SMA-F
Dimension	70X74X12 mm
Operating Temperature	-40 ~ +80°C
ROHS Compliant	Yes

Outline Drawing (Unit: mm):

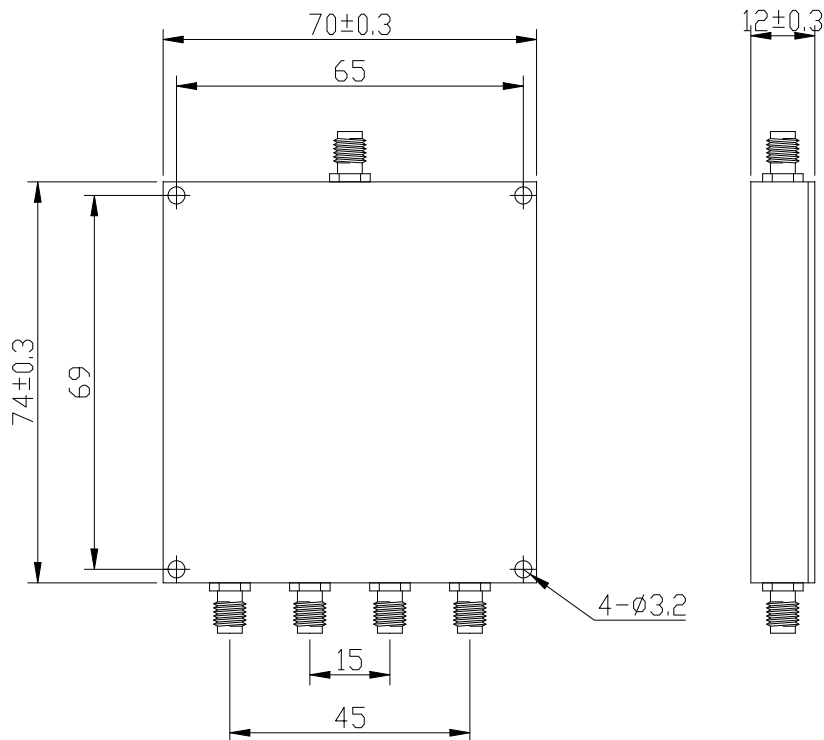

RFTYT Technology Co., LTD.

<http://www.rftyt.com>

E-mail : jackson@rftyt.com zqc7708@rftyt.com

TEL: +86-13088268828 FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

Ready For Tackling Your Trouble