





16 Way Power Divider

Features and Electrical specifications:

Model	PD16-F2190-S/2000-4000MHz	
Frequency Range	2000-4000 MHz	
Insertion Loss	≤1.6dB	
Isolation	18 dB Min	
VSWR	Input: 1.50 Max	Output: 1.50 Max
Amplitude Unbalance	±0.5 dB	
Phase Unbalance	± 6°	
Rated Power	Forward Power: 20 W	Reverse Power: 1 W
Impedance	50 Ω	
Connector Type	SMA-F	
Dimension	212.0X90.0X10.0 mm	
Surface Finishing	Grey Painting	
Operating Temperature	-45 ~ +85°C	
ROHS Compliant	Yes	

Outline Drawing (Unit: mm):

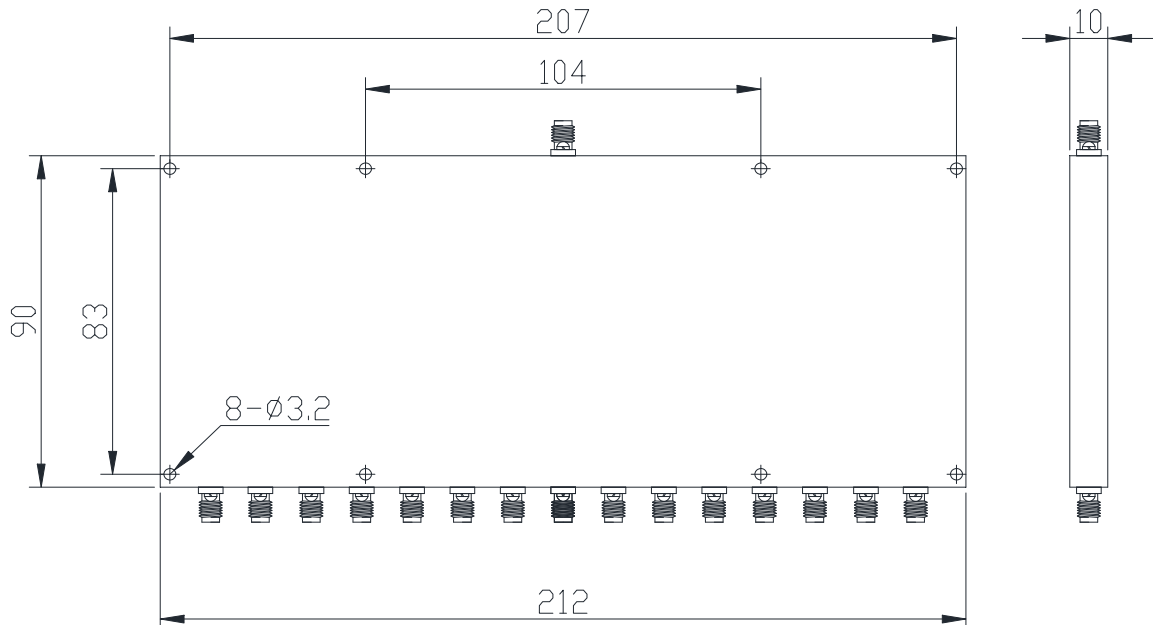

RFTYT Technology Co., LTD.

<http://www.rftyt.com>

E-mail : jackson@rftyt.com zqc7708@rftyt.com

TEL: +86-13088268828 FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

Ready For Tackling Your Trouble