




## 4 Way Power Divider

### Features and Electrical specifications:

|                       |                          |
|-----------------------|--------------------------|
| Model                 | PD04-F1271-S/698-2700MHz |
| Frequency Range       | 698-2700 MHz             |
| Insertion Loss        | ≤0.6dB                   |
| Split loss            | 6.0dB                    |
| Isolation             | ≥20dB                    |
| VSWR                  | 1.3 Max                  |
| Rated Power           | 50 W                     |
| Impedance             | 50 Ω                     |
| Connector Type        | SMA-F                    |
| Waterproof Grade      | IP65                     |
| Relative Humidity     | ≤95%                     |
| Surface Finishing     | Black Painting           |
| Operating Temperature | -20 ~ +60°C              |
| ROHS Compliant        | Yes                      |

Outline Drawing (Unit: mm):

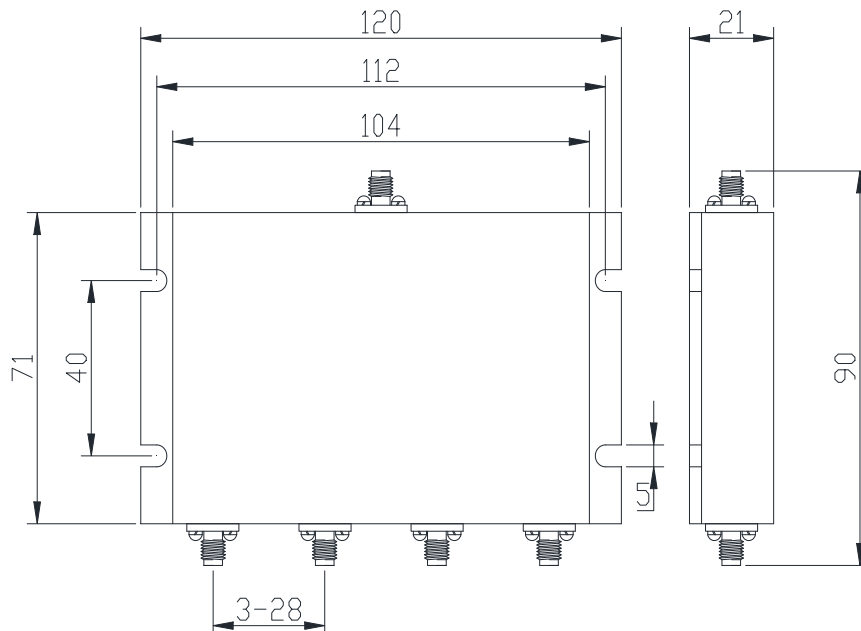

**RFTYT Technology Co., LTD.**

<http://www.rfyt.com>

E-mail : [jackson@rfyt.com](mailto:jackson@rfyt.com)      [zqc7708@rfyt.com](mailto:zqc7708@rfyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**