





2 Way Power Divider

Features and Electrical specifications:

Model	PD02-F2422-S/10-1000MHz		
Frequency Range	10-1000 MHz		
Insertion Loss	≤ 1.0 dB		
Isolation	≥ 20 dB Min		
VSWR	≤ 1.30 max		
Amplitude Balance	± 0.5 dB		
Phase Balance	± 5		
Rated Power	1 W Forward Power	0.125 W	Reverse Power
Impedance	50 Ω		
Connector Type	SMA-F		
Dimension	24X22X10 mm		
Operating Temperature	-55 ~ +85°C		
Surface Finishing	Conductive oxidation		
ROHS Compliant	Yes		

Outline Drawing (Unit: mm):

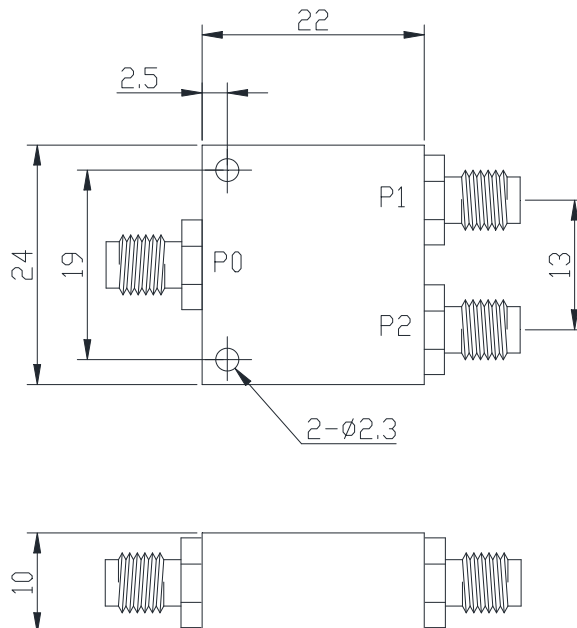

RFTYT Technology Co., LTD.

<http://www.rfyt.com>

E-mail : jackson@rfyt.com zqc7708@rfyt.com

TEL: +86-13088268828 FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

Ready For Tackling Your Trouble