


700 to 4000MHz Drop in Circulator

WH2020X Strip Line Type

Outline Drawing (mm):

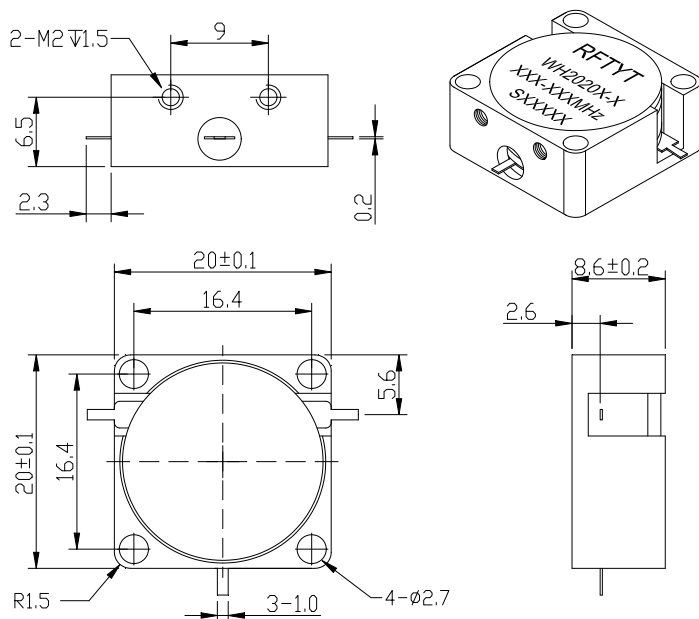

Features:

- ◇ Good temperature stability
- ◇ Withstand high power
- ◇ RoHS compliant
- ◇ Weight : ≈ 20 g

Material list:


- ◇ Shell: easy to cut iron plated nickel
- ◇ Inner guide body: silver plated brass

Application:

- ◇ Rf amplifier final stage, protect the amplifier
- ◇ Common transceiver antenna
- ◇ Digital communication
- ◇ Satellite communication
- ◇ Mobile communication

Order Examples:

WH 2020 X - 1-xx / xxx-xxx MHz

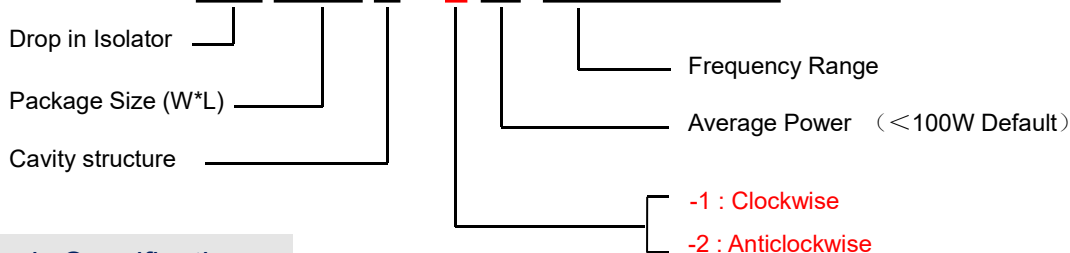

Basic Specifications:

Impedance	50 Ω
Operating temperature	-30~+75 $^{\circ}\text{C}$ / -40~+85 $^{\circ}\text{C}$
Storage temperature	-50~+90 $^{\circ}\text{C}$
Size(mm)	20.0*20.0*8.6

Specifications:

Model NO (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range MHz	Insertion Loss dB (max)	Isolation dB (min)	VSWR (max)	Power W
WH2020X-X/700-750MHz	700-750	0.40	20.0	1.25	100
WH2020X-X/750-800MHz	750-800	0.40	20.0	1.25	100
WH2020X-X/800-850MHz	800-850	0.40	20.0	1.25	100
WH2020X-X/850-855MHz	850-855	0.30	23.0	1.20	100
WH2020X-X/900-920MHz	900-920	0.30	23.0	1.20	100
WH2020X-X/925-960MHz	925-960	0.35	23.0	1.20	100
WH2020X-X/1000-1200MHz	1000-1200	0.50	18.0	1.3	100
WH2020X-X/1030-1090MHz	1030-1090	0.35	20.0	1.20	100
WH2020X-X/1070-1210MHz	1070-1210	0.50	18.0	1.30	100
WH2020X-X/1100-1300MHz	1100-1300	0.50	18.0	1.30	100
WH2020X-X/1200-1400MHz	1200-1400	0.50	19.0	1.25	100
WH2020X-X/1250-1450MHz	1250-1450	0.40	20.0	1.25	100
WH2020X-X/1325-1375MHz	1325-1375	0.30	23.0	1.20	100
WH2020X-X/1450-1550MHz	1450-1550	0.30	23.0	1.20	100
WH2020X-X/1500-1700MHz	1500-1700	0.40	20.0	1.25	100
WH2020X-X/1550-1650MHz	1550-1650	0.30	23.0	1.20	100
WH2020X-X/1626-1660MHz	1626-1660	0.30	23.0	1.20	100
WH2020X-X/1700-1900MHz	1700-1900	0.40	20.0	1.25	100
WH2020X-X/1700-2000MHz	1700-2000	0.40	19.0	1.25	100
WH2020X-X/1710-1785MHz	1710-1785	0.30	23.0	1.20	100
WH2020X-X/1710-2170MHz	1710-2170	0.50	18.0	1.30	100
WH2020X-X/1800-2400MHz	1800-2400	0.60	18.0	1.30	100
WH2020X-X/1805-1880MHz	1805-1880	0.30	23.0	1.20	100
WH2020X-X/1805-2117MHz	1805-2117	0.40	20.0	1.25	100
WH2020X-X/1920-1990MHz	1920-1990	0.30	23.0	1.20	100
WH2020X-X/2000-2200MHz	2000-2200	0.40	20.0	1.20	100



Model NO (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range MHz	Insertion Loss dB (max)	Isolation dB (min)	VSWR (max)	Power W
WH2020X-X/2000-2400	2000-2400	0.50	18.0	1.3	100
WH2020X-X/2100-2700	2100-2700	0.50	18.0	1.35	100
WH2020X-X/2110-2170	2110-2170	0.30	23.0	1.20	100
WH2020X-X/2135-2365	2135-2365	0.40	20.0	1.25	100
WH2020X-X/2200-2300	2200-2300	0.30	23.0	1.20	100
WH2020X-X/2200-2400	2200-2400	0.40	20.0	1.20	100
WH2020X-X/2200-2500	2200-2500	0.40	20.0	1.25	100
WH2020X-X/2300-2400	2300-2400	0.30	23.0	1.20	100
WH2020X-X/2300-2500	2300-2500	0.40	20.0	1.20	100
WH2020X-X/2300-2700	2300-2700	0.40	20.0	1.20	100
WH2020X-X/2400-2600	2400-2600	0.40	20.0	1.20	100
WH2020X-X/2496-2690	2496-2690	0.40	20.0	1.20	100
WH2020X-X/2500-2700	2500-2700	0.40	20.0	1.20	100
WH2020X-X/2600-2690	2600-2690	0.30	23.0	1.20	100
WH2020X-X/2700-2900	2700-2900	0.30	20.0	1.20	100
WH2020X-X/2700-3100	2700-3100	0.40	20.0	1.25	100
WH2020X-X/2700-3500	2700-3500	0.50	18.0	1.30	100
WH2020X-X/2900-3300	2900-3300	0.40	20.0	1.20	100
WH2020X-X/2900-3500	2900-3500	0.40	20.0	1.25	100
WH2020X-X/3100-3500	3100-3500	0.40	20.0	1.25	100
WH2020X-X/3150-3250	3150-3250	0.30	23.0	1.20	100
WH2020X-X/3300-3600	3300-3600	0.30	20.0	1.20	100
WH2020X-X/3300-3800	3300-3800	0.40	20.0	1.25	100
WH2020X-X/3400-3900	3400-3900	0.40	20.0	1.25	100
WH2020X-X/3400-4200	3400-4200	0.45	19.0	1.25	100
WH2020X-X/3400-4300	3400-4300	0.50	18.0	1.30	100
WH2020X-X/3550-3700	3550-3700	0.30	23.0	1.20	100

Model NO (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range MHz	Insertion Loss dB (max)	Isolation dB (min)	VSWR (max)	Power W
WH2020X-X/3600-3800	3600-3800	0.30	23.0	1.20	100
WH2020X-X/3900-4000	3900-4000	0.30	23.0	1.20	100

Instructions:

- 1, The circulator only provides through power, indicating that the transmission to the antenna and the antenna to the receiving are through power;
- 2, Only some common frequencies in the table, can be produced according to user requirements;
- 3, Embedded circulator, please use stainless steel or brass screws when installing;
- 4, If you do not find what you are looking for, please contact us!