





## Low Intermodulation Termination

### Features and Electrical specifications:

|                       |                                      |
|-----------------------|--------------------------------------|
| Model                 | CT-200W-FX1720-IP65-4310J/0.35-6G    |
| Frequency Range       | 0.35~6.0GHz                          |
| VSWR                  | 1.30 Max@0.35~6.0GHz                 |
| PIM3                  | ≤-150dBc/-155dBc/-160dBc @2*43dBm    |
| Power                 | 200W                                 |
| Impedance             | 50 Ω                                 |
| Connector Type        | 4.3-10-M (J)                         |
| Waterproof Grade      | IP65 or IP67                         |
| Dimension             | 200x170x64mm                         |
| Operating Temperature | -35 ~ +75°C (See de Power De-rating) |
| Color                 | Black                                |

### Outline Drawing (Unit: mm/inch):

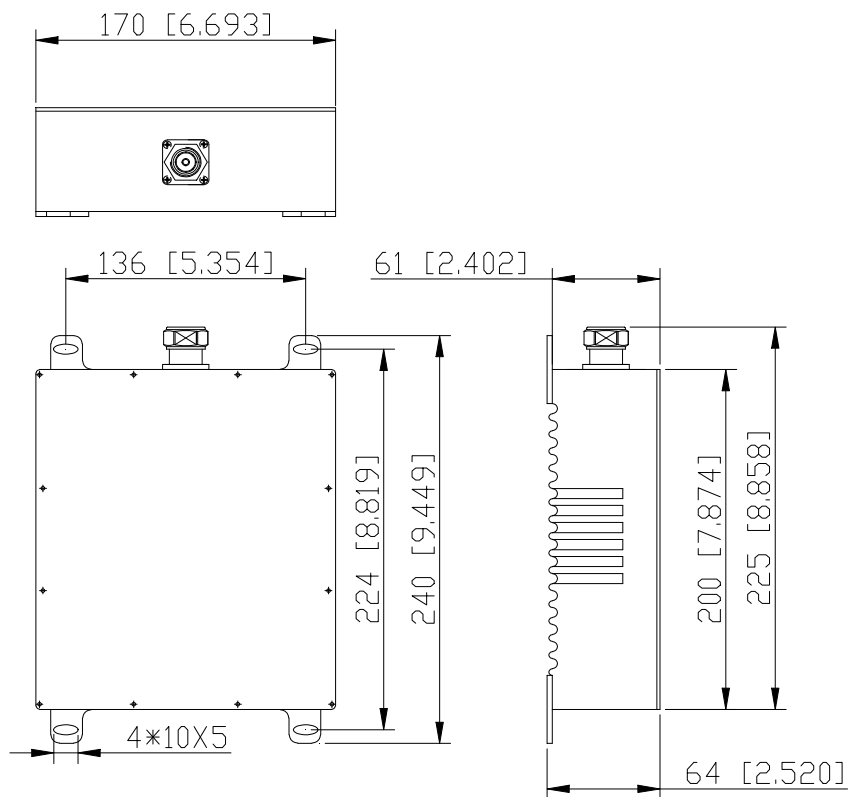

**RFTYT Technology Co., LTD.**

<http://www.rftyt.com>

E-mail: [jackson@rftyt.com](mailto:jackson@rftyt.com)      [zqc7708@rftyt.com](mailto:zqc7708@rftyt.com)

TEL: +86-13088268828      FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China

**Ready For Tackling Your Trouble**



Use attention:

- 1、 Dimensions Tolerance  $\pm 5\%$ ;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation;
- 3、 Custom designs available of other special Coaxial Terminations;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection.

Power De-rating:



P/N Designation:

