





Low Intermodulation Termination

Features and Electrical specifications:

| | |
|-----------------------|--------------------------------------|
| Model | CT-50W-RX5015-IP65-NK/0.35-6G |
| Frequency Range | 0.35~6.0GHz |
| VSWR | 1.30 Max |
| PIM3 | ≤-150dBc/-155dBc/-160dBc @2*43dBm |
| Power | 50W |
| Impedance | 50 Ω |
| Connector Type | N-F (K) |
| Waterproof Grade | IP65 or IP67 |
| Dimension | Φ50×150mm |
| Operating Temperature | -35 ~ +75°C (See de Power De-rating) |
| Color | Black |
| Weight | Around 620g |

Outline Drawing (Unit: mm/inch):

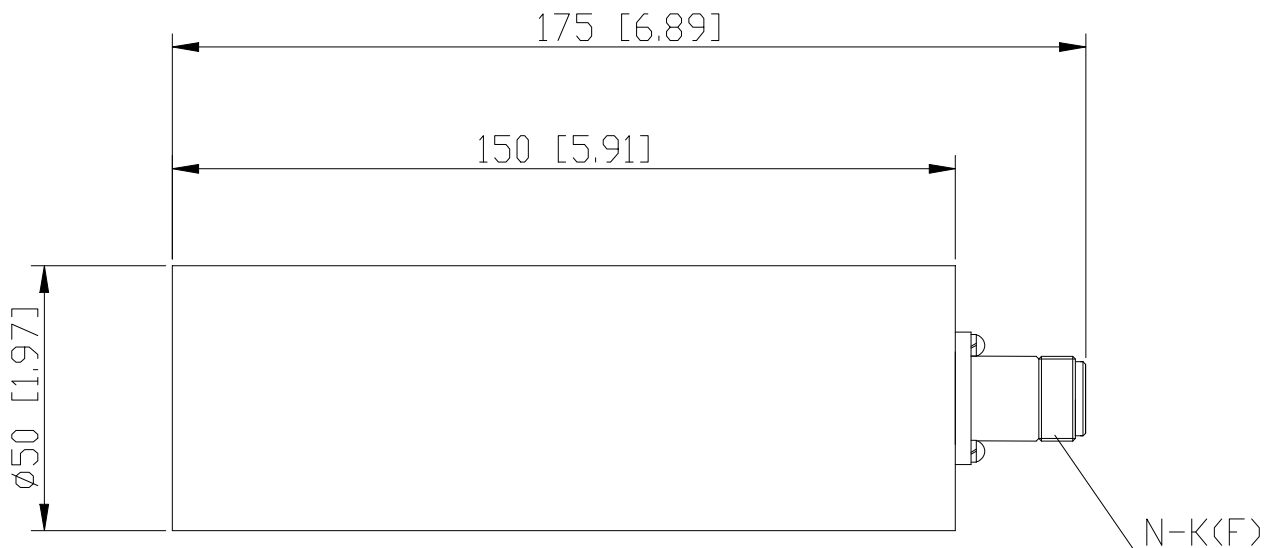

RFTYT Technology Co., LTD.

<http://www.rfyt.com>

E-mail: jackson@rfyt.com zqc7708@rfyt.com

TEL: +86-13088268828 FAX: +86-816-2846565

218# Wenwu Middle Road, Jinkai District, Mianyang, Sichuan Province China


Ready For Tackling Your Trouble



Use attention:

- 1、 Dimensions Tolerance $\pm 5\%$;
- 2、 If necessary, the product shall be air-cooled for auxiliary heat dissipation;
- 3、 Custom designs available of other special Coaxial Terminations;
- 4、 Pay attention to the direction of the product during use and strictly prohibit reverse connection.

Power De-rating:

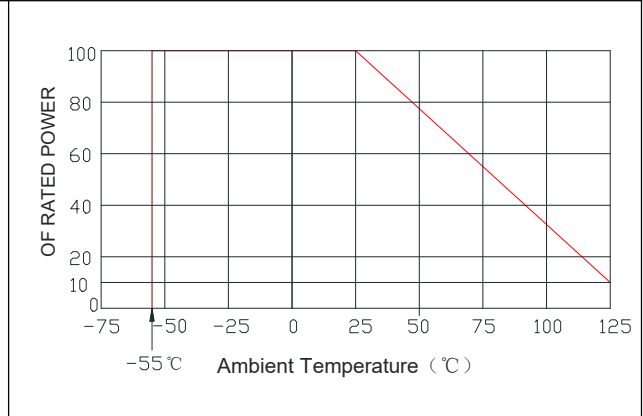

P/N Designation:

