





Power Divider / Splitter

◆ Specifications

Model	PD02-F1011-N/134-174MHz	2 way	
	PD03-F1610-N/134-174MHz	3 way	
	PD04-F1820-N/134-174MHz	4 way	
Frequency Range	134-174 MHz		
Insertion Loss (max)	≤0.7dB	≤1.0 dB	≤1.2dB
Split loss	3.0dB	4.8dB	6.0dB
VSWR (max)	1.25	1.35	
Isolation (min)	18 dB		
Average Power	50 W		
Impedance	50 OHMS		
Connector Type	N-F		
Temperature	-40~+80℃ *		
Relative Humidity	≤95%		
Rohs Compliant	Yes		

◆ Outline Drawing(Unit: mm)

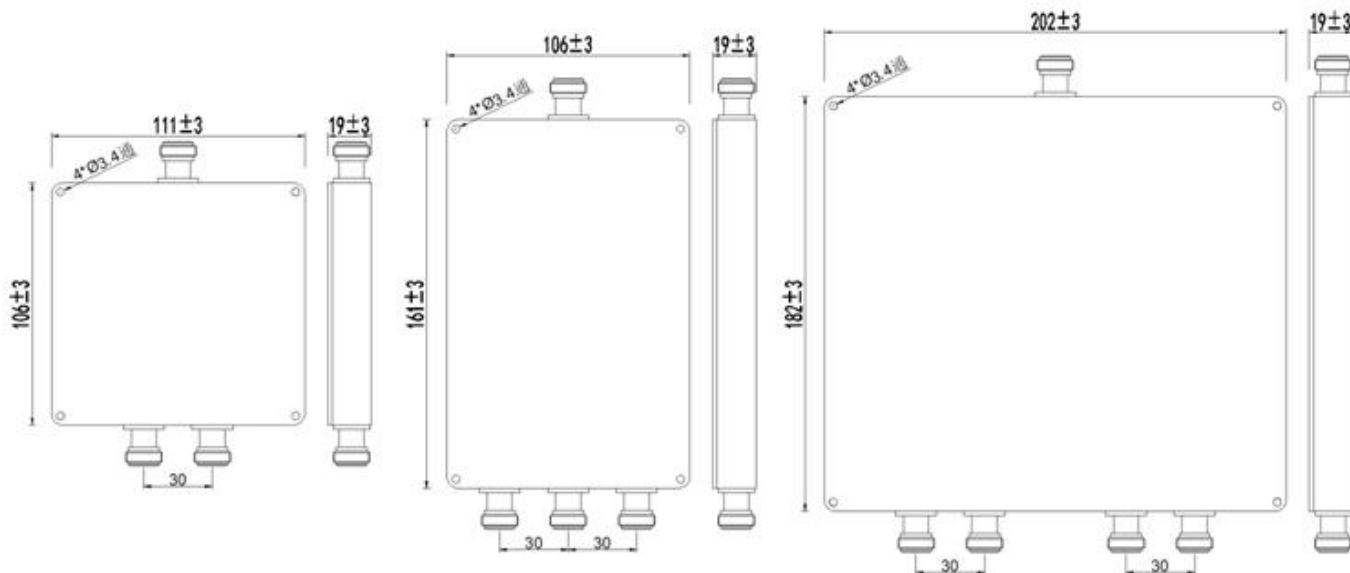

Unit: mm, General part tolerance is ±2% unless otherwise stated

RFTYT Technology Co., LTD.

E-mail: Jackson@rftyt.com <http://www.rftyt.com>

TEL: +86-816-2846565 FAX: +86-816-2846565

677# Tangfang Road, Jingkai Dist, Mianyang City, Sichuan Province China

The most important outcome is we build trust