RF Coaxial Circulator

◆Specifications

01	Model	TH5656AS-1/800-2000MHz (→ Clockwise) TH5656AS-2/800-2000MHz (← Anticlockwise)
02	Frequency Range	800-2000 MHz
03	Insertion Loss (max)	1.3 dB
04	Isolation (min)	13 dB
05	VSWR (max)	1.6
06	Forward Power (max)	50 W CW
07	Connector Type	SMA-F*
08	Temperature	25~+85℃ *

Remarks: Items with "*" in the form can be produced according to customer's requirements.

◆Outline Drawing(Unit: mm)

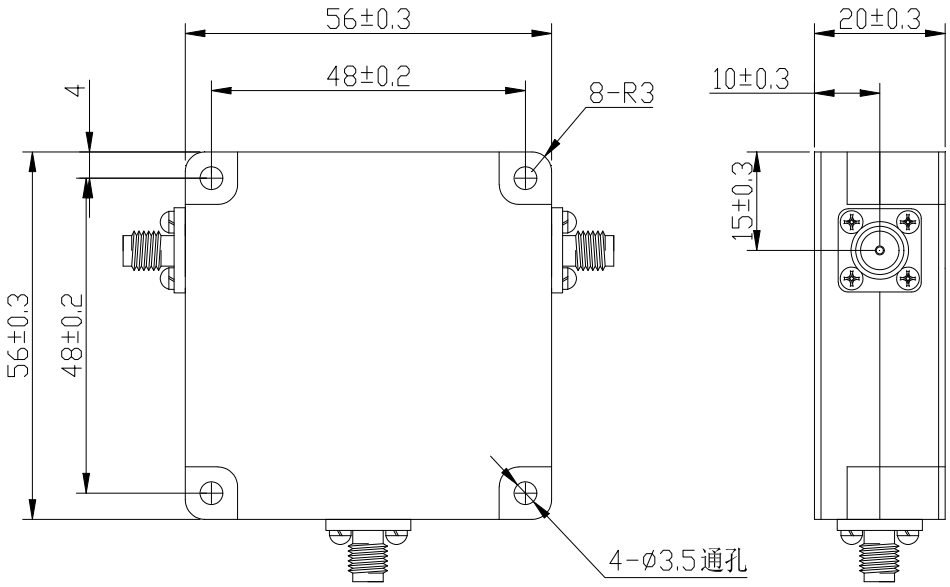

Unit: mm, General part tolerance is ±2% unless otherwise stated

RFTYT Technology Co., LTD.
E-mail:Jackson@rftyt.com http://www.rftyt.com
TEL: +86-13088268828 FAX: +86-816-2846565
4th floor, building 9，218 Wenwu Middle Road, Jinkai District, Mianyang, Sichuan, China

The most important outcome is we build trust